




商品介紹 Product description

- 材質：不鏽鋼
- 表面處理：不鏽鋼本色
- 用途：板金工業、用於支撐門板、氣窗設備等
- 備註：1. 訂購時請主動告知氮氣填充量。
2. 有效行程至少需預留5-10mm以防碰撞。

-
- Material: Stainless steel
 - Finish: Stainless steel
 - Uses: Sheet metal industry, used to support door panels, transom equipment, etc.
 - Notes:
 1. Please take the initiative to inform the nitrogen filling amount when ordering.
 2. At least 5-10mm of effective travel should be reserved to prevent collision.
-

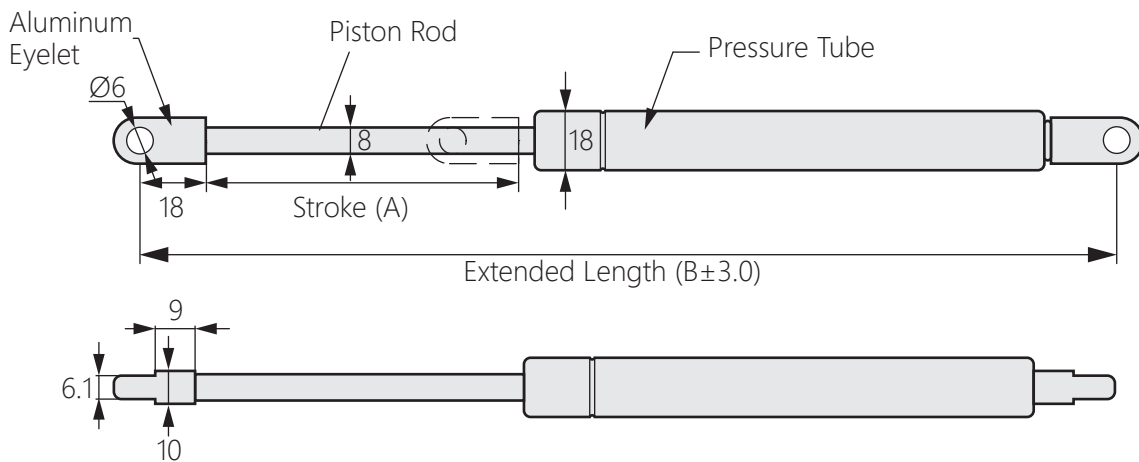

商品型號	行程 (A)	總長 (B)	氮氣值 (N)
HG-192-1	60	201	100-650N
HG-192-2	80	241	
HG-192-3	100	281	
HG-192-4	120	321	
HG-192-5	140	361	
HG-192-6	160	401	
HG-192-7	180	441	
HG-192-8	200	481	
HG-192-9	220	521	
HG-192-10	250	581	