

球頭柱塞



LZ-104


Ball plunger



商品介紹 Product description

- 1.球頭柱塞結構簡單，先端球頭依靠內部彈簧頂出固定的行程，克服彈力壓入球頭即可釋放。
- 2.前端無扳手槽，須配合內六角扳手使用。

- 1.The ball head plunger has a simple structure,the tip ball head relies on the internal spring to push out a fixed stroke,and the ball head can be released by overcoming the elastic force.
- 2.There is no wrench slot at the front end and must be used with an Allen wrench.

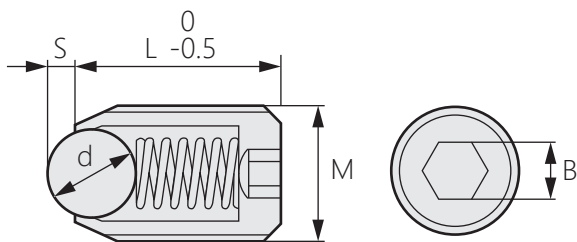

商品型號	主體			球頭	彈簧	
	材質	硬度	表面處理	材質	硬度	材質
LZ-104-1	SCM435	29-35HRC	黑色	SUJ2	55HRC~	SWP-B
LZ-104-2				聚縮醛	-	
LZ-104-3	SUS304	-	-	SUS440C	55HRC~	
LZ-104-4				聚縮醛	-	

商品型號				M	L	d	S	B	彈力							
									超輕載 (1H)		輕載 (2H)		重載 (3H)		超重載 (4H)	
									min	max	min	max	min	max	min	max
LZ-104-1-1	LZ-104-2-1	LZ-104-3-1	LZ-104-4-1	3	5.6.8.10.12.16	1.5	0.5	1.5	0.3	0.64	1	2	1.5	2.9	2.2	5
LZ-104-1-2	LZ-104-2-2	LZ-104-3-2	LZ-104-4-2	4	6.10.12.16.20	2	0.7	2	0.6	1.6	2	4.9	3.9	9.8	5.2	12.5
LZ-104-1-3	LZ-104-2-3	LZ-104-3-3	LZ-104-4-3	5	8.10.12.16.18.20.25.30	2.5	0.8	2.5	1	3.12	2.9	9.8	4.9	19.6	11.2	24.1
LZ-104-1-4	LZ-104-2-4	LZ-104-3-4	LZ-104-4-4	6	8.10.12.14.16.20.25.30	3	1.2	3	1.6	4.85	4.9	14.7	9.8	29.4	17.7	33.4
LZ-104-1-5	LZ-104-2-5	LZ-104-3-5	LZ-104-4-5	8	10.12.16.20.23.25.30.35.40.50	5	2	4	2.4	6.36	6.9	19.6	12.	39.2	21.4	45.3
LZ-104-1-6	LZ-104-2-6	LZ-104-3-6	LZ-104-4-6	10	16.19.20.25.27.30.35.40.45.50	6	2.5	5	3	8.1	8.8	24.5	18.6	49	23.5	58.7
LZ-104-1-7	LZ-104-2-7	LZ-104-3-7	LZ-104-4-7	12	20.22.25.30.32.35.40	8	3	6	3.5	9.68	9.8	29.4	19.6	58.8	24.1	62.3
LZ-104-1-8	LZ-104-2-8	LZ-104-3-8	LZ-104-4-8	16	25.30.35.40	10	4	8	5.7	15.8	15.7	49	29.4	98	43.6	116