

2孔型固定環

Two-hole shaft collar



TH-220




商品介紹 Product description

- 1. 緊固力較好。
- 2. 能避免因緊固而造成軸的損傷。
- 3. 本產品額外含有附屬品-1pcs內六角螺栓。


- 材質：S45C、內六角螺栓-SCM435
- 表面處理：染黑處理
- 用途：軸承固定用、其他安裝零件、緩衝器等

- 1. Provides better clamping force.
- 2. Prevents damage to the shaft caused by tightening.
- 3. This product additionally includes an accessory :
1 pcs hex socket screw.

- Material: S45C 、Hex socket head cap screw-SCM435
- Finish: Black oxide finish
- Uses: Bearing fixation, other mounting components, dampers, etc.

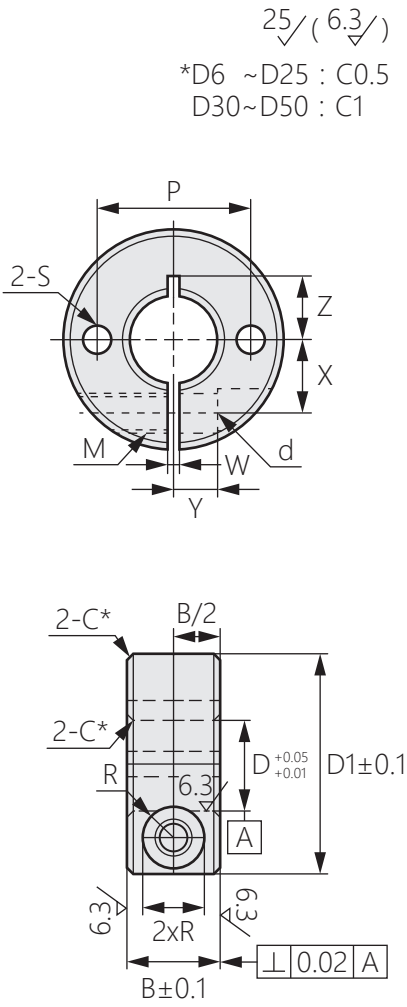

安裝示意圖



按照上圖範例使用固定環時，如果用螺栓2先將固定環鎖牢在板上之後，才用螺栓1固定導桿，有時會難以固定。

•建議使用：可先將固定環以螺栓鎖在板上。

商品型號	D	B	D1	M	d	R	W	X	Y	Z	P	S																	
TH-220-1-1	6	8	20	M3	3.4	3	1	6	4	6~6.5	12	3.5																	
TH-220-1-2		10		M4	4.5	3.75					13																		
TH-220-2-1	8	8	25	M3	3.4	3	1.5	8	5	7~9	14	4.5																	
TH-220-2-2		10		M4	4.5	3.75					18																		
TH-220-2-3		12	30	M5	5.5	4.5		9		7~10	20	5.5																	
TH-220-2-4		15		M6	6.6	6																							
TH-220-3-1	10	8	30	M3	3.4	3		9	5	8~10	24	6.6																	
TH-220-3-2		10		M4	4.5	3.75																							
TH-220-3-3		12	M5	5.5	4.5	10				6	8~12	22	5.5																
TH-220-3-4		15	35	M6	6.6									6															
TH-220-4-1	12	8	30	M3	3.4	3		10	5	9~10	24	6.6																	
TH-220-4-2		10		M4	4.5	3.75																							
TH-220-4-3		12	M5	5.5	4.5	11				6	9~12	22	4.5																
TH-220-4-4		15	35	M6	6.6									6															
TH-220-5-1	13	10	30	M4	4.5	3.75		1.5	10	5	10	23	5.5																
TH-220-5-2		12	34	M5	5.5	4.5			11					10~12	24														
TH-220-5-3		15	35	M6	6.6	6			11.5	6	10~11	23	4.5																
TH-220-6-1		15	10	34	M4	4.5								3.75	12	11~13	26	5.5											
TH-220-6-2	12		35	M5	5.5	4.5			13	8	28	6.6																	
TH-220-6-3	15		40	M6	6.6	6			12	6			11~12	24	4.5														
TH-220-7-1	16	10	35	M5	5.5	4.5			13	8	11~13	28	4.5																
TH-220-7-2		12		M6	6.6	6								26	5.5														
TH-220-7-3		15	40	M5	5.5	4.5						14	7	13	30	5.5													
TH-220-8-1	20	10		45	M6	6.6	6		15	8	13~15	34	6.6																
TH-220-8-2		12												M5	5.5	4.5	16	7	16	36	5.5								
TH-220-8-3		15		55	M6	6.6	6		17	7	16~18	38	6.6																
TH-220-8-4		20	25											M8	9	7	18	10	16~20	40									
TH-220-8-5		25																			30	M6	6.6	6	20	18~20	44		
TH-220-8-6	30	60	M8	9	7	23	12		21	48	6.6																		
TH-220-9-1	25											12	M5	5.5	4.5	2	26	13	23	56	9								
TH-220-9-2												15	50	M6	6.6							6	18	10	16~20	40			
TH-220-9-3												20	25														M8	9	7
TH-220-9-4		25	30	M6	6.6	6	23		21	48																			
TH-220-9-5	30	70									M8	9	7	26	13	23	56	9											
TH-220-10-1	30		15	60	M6	6.6	6		2	32									16	28	68	11							
TH-220-10-2			20					25															M8	9	7	23	21	48	
TH-220-10-3			25																										30
TH-220-10-4		30	85								M10	11	9	3	32	16	28	68											
TH-220-11-1	35	15		60	M6	6.6	6	2	26	13									23	56	9								
TH-220-11-2		20																				25	M8	9	7	23	21	48	
TH-220-11-3		25																											30
TH-220-11-4		30	85								M10	11	9	3	32	16	28	68											
TH-220-12-1	40	18		70	M8	9	7	2	26	13									23	56	9								
TH-220-12-2		30																				85	M10	11	9	3	32	16	28
TH-220-13-1	50	22		85	M10	11	9	3	32	16									28	68	11								
TH-220-13-2		30	85								M10	11	9	3	32	16	28	68											