

## 2孔攻牙型固定環



TH-223

### Fixing ring with two tapped holes

### 商品介紹 Product description

- 1.此款為粗螺紋型，緊固力較好。
- 2.能避免因緊固而造成軸的損傷。
- 3.本產品額外含有附屬品-1pcs內六角螺栓。

●材質：S45C、內六角螺栓-SCM435

●表面處理：染黑處理

●用途：軸承固定用、其他安裝零件、緩衝器等

1. This model features coarse threads for improved clamping force.
2. Prevents damage to the shaft caused by tightening.
3. This product additionally includes an accessory :  
1 pcs hex socket screw.



●Material: S45C、Hex socket head cap screw-SCM435

●Finish: Black oxide finish


●Uses: Bearing fixation, other mounting components, dampers, etc.



25/(6.3/)  
\*D6 ~D25 : C0.5  
D30~D50 : C1

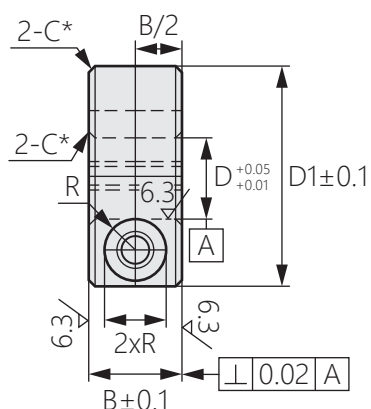

安裝示意圖



按照上圖範例使用固定環時，如果用螺栓2先將固定環鎖牢在板上之後，才用螺栓1固定導桿，有時會難以固定。

●建議使用：可先將固定環以螺栓鎖在板上。

| 商品型號        | D  | B  | D1 | M  | d   | R    | W   | X    | Y  | Z     | P  | S   |
|-------------|----|----|----|----|-----|------|-----|------|----|-------|----|-----|
| TH-223-1-1  | 6  | 8  | 20 | M3 | 3.4 | 3    | 1   | 6    | 4  | 6~6.5 | 12 | 3.5 |
| TH-223-1-2  |    | 10 |    | M4 | 4.5 | 3.75 |     |      |    |       | 13 |     |
| TH-223-2-1  | 8  | 8  | 25 | M3 | 3.4 | 3    |     | 8    |    | 7~9   | 14 | 4.5 |
| TH-223-2-2  |    | 10 |    | M4 | 4.5 | 3.75 |     |      |    |       | 18 |     |
| TH-223-2-3  |    | 12 |    | M5 | 5.5 | 4.5  |     |      |    | 7~10  |    |     |
| TH-223-3-1  | 10 | 8  |    | M3 | 3.4 | 3    |     | 9    | 5  | 8~10  | 20 | 5.5 |
| TH-223-3-2  |    | 10 |    | M4 | 4.5 | 3.75 |     |      |    |       |    |     |
| TH-223-3-3  |    | 12 | 30 | M5 | 5.5 | 4.5  |     |      |    |       |    |     |
| TH-223-4-1  | 12 | 8  |    | M3 | 3.4 | 3    |     | 10   |    | 9~10  | 22 |     |
| TH-223-4-2  |    | 10 |    | M4 | 4.5 | 3.75 |     |      |    |       |    |     |
| TH-223-4-3  |    | 12 |    | M5 | 5.5 | 4.5  |     |      |    |       |    |     |
| TH-223-4-4  |    | 15 | 35 | M6 | 6.6 | 6    |     | 11   | 6  | 9~12  | 24 | 6.6 |
| TH-223-5-1  | 13 | 10 | 30 | M4 | 4.5 | 3.75 | 1.5 | 10   | 5  | 10    | 22 | 4.5 |
| TH-223-5-2  |    | 12 | 34 | M5 | 5.5 | 4.5  |     | 11   |    | 10~12 | 23 | 5.5 |
| TH-223-6-1  | 15 | 10 |    | M4 | 4.5 | 3.75 |     | 11.5 | 6  | 10~11 | 26 | 4.5 |
| TH-223-6-2  |    | 12 | 35 | M5 | 5.5 | 4.5  |     | 12   |    | 11~13 | 28 | 5.5 |
| TH-223-6-3  |    | 15 | 40 | M6 | 6.6 | 6    |     | 13   | 8  |       |    | 6.6 |
| TH-223-7-1  | 16 | 10 | 35 | M5 | 5.5 | 4.5  |     | 12   | 6  | 11~12 | 24 | 4.5 |
| TH-223-7-2  |    | 12 |    | M6 | 6.6 | 6    |     | 13   |    |       | 26 | 5.5 |
| TH-223-7-3  |    | 15 |    | M6 | 6.6 | 6    |     | 13   | 8  | 11~13 | 28 | 6.6 |
| TH-223-8-1  | 18 | 10 | 40 | M5 | 5.5 | 4.5  |     | 14   | 7  | 13    | 30 | 4.5 |
| TH-223-8-2  |    | 12 |    | M6 | 6.6 | 6    |     | 15   |    | 13~15 | 34 | 5.5 |
| TH-223-8-3  |    | 15 | 45 | M6 | 6.6 | 6    |     | 15   | 8  |       |    | 6.6 |
| TH-223-9-1  | 20 | 10 | 40 | M5 | 5.5 | 4.5  |     | 14   | 7  | 13    | 28 | 4.5 |
| TH-223-9-2  |    | 12 |    | M6 | 6.6 | 6    |     | 15   |    |       | 30 | 5.5 |
| TH-223-9-3  |    | 15 | 45 | M6 | 6.6 | 6    |     | 15   | 8  | 13~15 | 34 | 6.6 |
| TH-223-10-1 | 25 | 12 |    | M5 | 5.5 | 4.5  |     | 17   | 7  | 16    | 36 | 5.5 |
| TH-223-10-2 |    | 15 | 50 | M6 | 6.6 | 6    |     | 18   |    | 16~18 | 38 | 6.6 |
| TH-223-11-1 | 30 |    | 55 | M6 | 6.6 | 6    |     | 20   | 10 | 18~20 | 44 |     |