

2孔攻牙型固定環



TH-224

Fixing ring with two tapped holes

商品介紹 Product description

- 1.此款為粗螺紋型，緊固力較好。
- 2.能避免因緊固而造成軸的損傷。
- 3.本產品額外含有附屬品-1pcs內六角螺栓。

●材質：S45C、內六角螺栓-SUS304

●表面處理：鍍無電解鎳


●用途：軸承固定用、其他安裝零件、緩衝器等

1. This model features coarse threads for improved clamping force.
2. Prevents damage to the shaft caused by tightening.
3. This product additionally includes an accessory :
1 pcs hex socket screw.


●Material: S45C、Hex socket head cap screw-SUS304

●Finish: Electroless nickel plating

●Uses: Bearing fixation, other mounting components, dampers, etc.

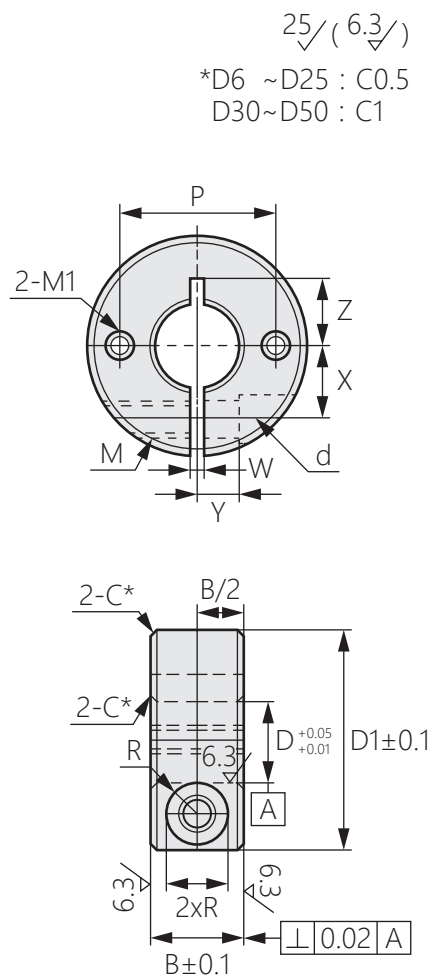

安裝示意圖



按照左圖範例使用固定環時，如果用螺栓2先將固定環鎖牢在板上之後，才用螺栓1固定導桿，有時會難以固定。

●建議使用：可先將固定環以螺栓鎖在板上。

商品型號	D	B	D1	M	d	R	W	X	Y	Z	P	S
TH-224-1-1	6	8	20	M3	3.4	3	1	6	4	6~6.5	12	3.5
TH-224-1-2		10		M4	4.5	3.75					13	
TH-224-2-1	8	8	25	M3	3.4	3		8		7~9	14	4.5
TH-224-2-2		10		M4	4.5	3.75					18	
TH-224-2-3		12		M5	5.5	4.5				7~10		
TH-224-3-1	10	8	30	M3	3.4	3		9	5	8~10	20	5.5
TH-224-3-2		10		M4	4.5	3.75						
TH-224-3-3		12		M5	5.5	4.5						
TH-224-4-1	12	8		M3	3.4	3		10		9~10	22	
TH-224-4-2		10		M4	4.5	3.75						
TH-224-4-3		12		M5	5.5	4.5						
TH-224-4-4		15	35	M6	6.6	6		11	6	9~12	24	6.6
TH-224-5-1	13	10	30	M4	4.5	3.75	1.5	10	5	10	22	4.5
TH-224-5-2		12	34	M5	5.5	4.5		11		10~12	23	5.5
TH-224-6-1	15	10	35	M4	4.5	3.75		11.5	6	10~11		4.5
TH-224-6-2		12		M5	5.5	4.5		12		11~13	26	5.5
TH-224-6-3		15	40	M6	6.6	6		13	8		28	6.6
TH-224-7-1	16	10	35	M5	5.5	4.5		12	6	11~12	24	4.5
TH-224-7-2		12		M6	6.6	6					26	5.5
TH-224-7-3		15		M6	6.6	6		13	8	11~13	28	6.6
TH-224-8-1	18	10	40	M5	5.5	4.5		14	7	13		4.5
TH-224-8-2		12		M6	6.6	6					30	5.5
TH-224-8-3		15	45	M6	6.6	6		15	8	13~15	34	6.6
TH-224-9-1	20	10	40	M5	5.5	4.5		14	7	13	28	4.5
TH-224-9-2		12		M6	6.6	6					30	5.5
TH-224-9-3		15	45	M6	6.6	6		15	8	13~15	34	6.6
TH-224-10-1	25	12	50	M5	5.5	4.5		17	7	16	36	5.5
TH-224-10-2		15		M6	6.6	6						
TH-224-11-1	30	15	55	M6	6.6	6		18	10	16~18	38	6.6
								20		18~20	44	