

2孔攻牙型固定環



TH-225

Fixing ring with two tapped holes



商品介紹 Product description

- 1.此款為粗螺紋型，緊固力較好。
- 2.能避免因緊固而造成軸的損傷。
- 3.本產品額外含有附屬品-1pcs內六角螺栓。

●材質：SUS304


●用途：軸承固定用、其他安裝零件、緩衝器等

1. This model features coarse threads for improved clamping force.
2. Prevents damage to the shaft caused by tightening.
3. This product additionally includes an accessory :
1 pcs hex socket screw.


●Material: SUS304

●Uses: Bearing fixation, other mounting components, dampers, etc.

25/(6.3/)
*D6 ~D25 : C0.5
D30~D50 : C1

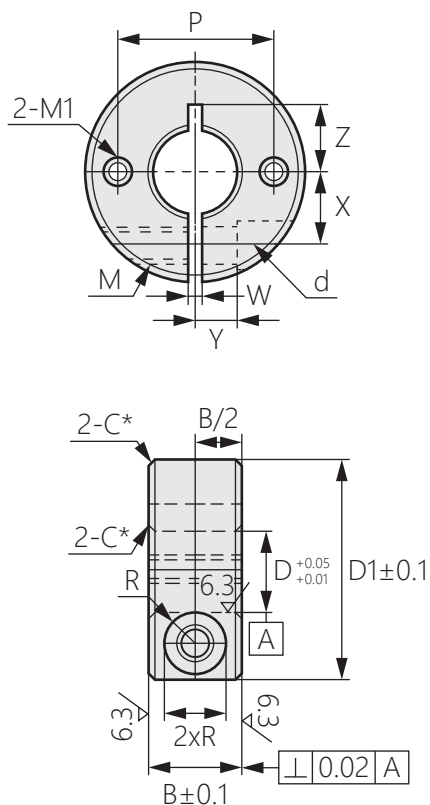

安裝示意圖



商品型號	D	B	D1	M	d	R	W	X	Y	Z	P	S			
TH-225-1-1	6	8	20	M3	3.4	3	1	6	4	6~6.5	12	3.5			
TH-225-1-2		10		M4	4.5	3.75					13				
TH-225-2-1	8	8	25	M3	3.4	3	1.5	8	5	7~9	14		4.5		
TH-225-2-2		10		M4	4.5	3.75					18				
TH-225-2-3		12		M5	5.5	4.5				7~10		5.5			
TH-225-3-1	10	8	30	M3	3.4	3		9		8~10	20		5.5		
TH-225-3-2		10		M4	4.5	3.75									
TH-225-3-3		12		M5	5.5	4.5									
TH-225-4-1	12	8		M3	3.4	3		10		9~10	22				
TH-225-4-2		10		M4	4.5	3.75									
TH-225-4-3		12		M5	5.5	4.5									
TH-225-4-4	13	15	35	M6	6.6	6		1.5	11	6	9~12	24	6.6		
TH-225-5-1		10	30	M4	4.5	3.75			10	5	10	22	4.5		
TH-225-5-2		12	34	M5	5.5	4.5			11		10~12	23	5.5		
TH-225-6-1	10	M4		4.5	3.75	11.5			6	10~11	4.5				
TH-225-6-2	15	12	35	M5	5.5	4.5				12	11~13	26	5.5		
TH-225-6-3		15	40	M6	6.6	6			13	8		28	6.6		
TH-225-7-1	16	10	35	M5	5.5	4.5			1.5	12	6	11~12	24	4.5	
TH-225-7-2		12											26	5.5	
TH-225-7-3		15		40	M6	6.6				6	13	8	11~13	28	6.6
TH-225-8-1	10	M5	5.5		4.5	14				7	13	4.5			
TH-225-8-2	12			30								5.5			
TH-225-8-3	15	45	M6	6.6	6	15				8	13~15	34	6.6		
TH-225-9-1	20	10	40	M5	5.5	4.5				1.5	14	7	13	28	4.5
TH-225-9-2		12												30	5.5
TH-225-9-3		15	45	M6	6.6	6					15	8	13~15	34	6.6
TH-225-10-1	25	12		M5	5.5	4.5					17	7	16	36	5.5
TH-225-10-2		15		50	M6	6.6					6	18	10	16~18	38
TH-225-11-1			30	55											

按照左圖範例使用固定環時，如果用螺栓2先將固定環鎖牢在板上之後，才用螺栓1固定導桿，有時會難以固定。

●建議使用：可先將固定環以螺栓鎖在板上。