

3 孔攻牙型固定環



TH-334

Fixing ring with three tapped holes

商品介紹 Product description

- 1.此款為粗螺紋型，緊固力較好。
- 2.能避免因緊固而造成軸的損傷。
- 3.本產品額外含有附屬品-1pcs內六角螺栓。





25/(6.3/)
*D6 ~D25 : C0.5
D30~D50 : C1


- 材質：S45C、內六角螺栓-SUS304
- 表面處理：鍍無電解鎳
- 用途：軸承固定用、其他安裝零件、緩衝器等

- 1. This model features coarse threads for improved clamping force.
- 2. Prevents damage to the shaft caused by tightening.
- 3. This product additionally includes an accessory :
1 pcs hex socket screw.

- Material: S45C、Hex socket head cap screw-SUS304
- Finish: Electroless nickel plating
- Uses: Bearing fixation, other mounting components, dampers, etc.

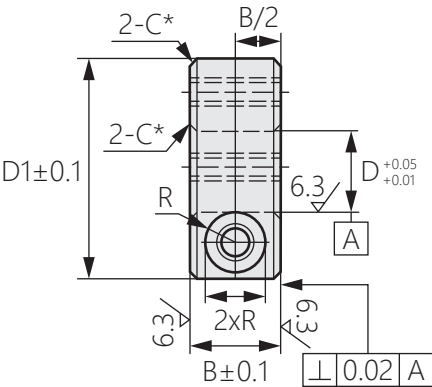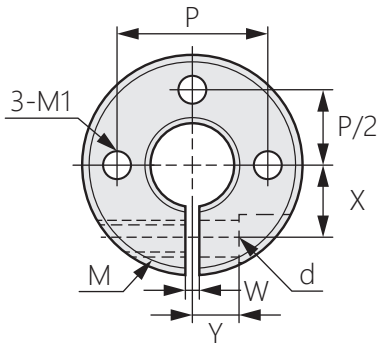

安裝示意圖

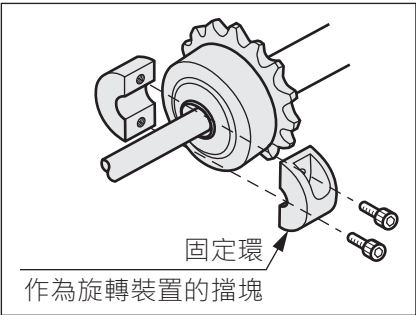

商品型號	D	B	D1	M	d	R	W	X	Y	P	S
TH-334-1-1	6	8	20	M3	3.4	3	1	6	4	12	3.5
TH-334-1-2		10		M4	4.5	3.75				13	
TH-334-2-1	8	8	25	M3	3.4	3	1.5	8	5	14	4.5
TH-334-2-2		10		M4	4.5	3.75				18	
TH-334-3-1	10	8	30	M3	3.4	3		9	5	20	5.5
TH-334-3-2		10		M4	4.5	3.75				22	
TH-334-4-1	12	12	30	M5	5.5	4.5		10	5	22	4.5
TH-334-4-2		12		M4	4.5	3.75				23	
TH-334-5-1	13	10	34	M5	5.5	4.5		11.5	6	26	5.5
TH-334-6-1	15	12	35	M6	6.6	6				28	6.6
TH-334-6-2		15	40	M5	5.5	4.5		12	6	26	5.5
TH-334-6-3	16	15	40	M6	6.6	6				28	6.6
TH-334-7-1		12	35	M5	5.5	4.5		13	8	26	5.5
TH-334-7-2	20	15	40	M6	6.6	6				30	5.5
TH-334-8-1		10	40	M5	5.5	4.5		14	7	34	6.6
TH-334-8-2	25	12	45	M6	6.6	6				36	5.5
TH-334-8-3		15	45	M5	5.5	4.5		17	7	38	6.6
TH-334-9-1	30	12	50	M6	6.6	6				44	6.6
TH-334-9-2		15	55	M5	5.5	4.5		18	10	48	9
TH-334-10-1	35	12	60	M6	6.6	6				56	9
TH-334-11-1		15	60	M5	5.5	4.5		20	12	56	9
TH-334-12-1	40	18	70	M8	9	7				56	9